


RBS02A-P24/2.3L

24 V / 2.3 Ah

- Battery pack for eNSP3-450P series
- Maintenance-free lead battery, in clip-on frame
- "Plug and Play" installation in 5.25" drive slot

The RBS02A-P24/2.3L battery pack feeds UPS PC power supply units of the eNSP3-450P-xx series with energy. Very compact, it is intended to be installed into a 5.25" drive slot.


The connection between the battery pack and the UPS PC power supply unit is made through a connector equipped with a protection fuse. The lead batteries are free of maintenance.

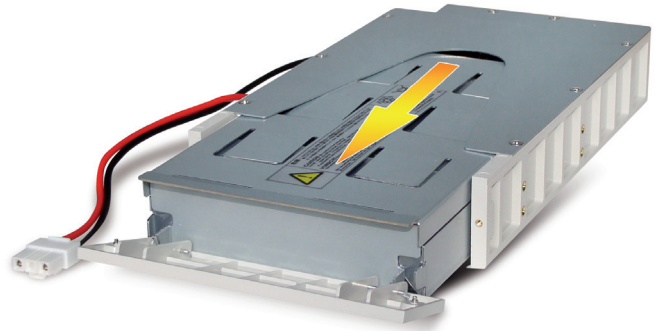

Technical data	
Voltage	24 VDC
Capacitance	2.3 Ah
Number of batteries	2
Type of battery	Maintenance-free lead battery, 12 V
Backup time of a typical PC	300 W app. 2 minutes, 150 W app. 6 minutes
Fuse	30 A internal
Connector	JST, VL series
Operating temperature	0...+40 °C
Storage temperature	-20...+50 °C
Dimensions (WxDxH)	149 x 245 x 42 mm ±0.5mm
Weight (net)	3.5 kg

Drawing RBS02A-P24/2.3L

BATT PIN No.	Function
1	Batt +
2	N.C.
3	Batt -

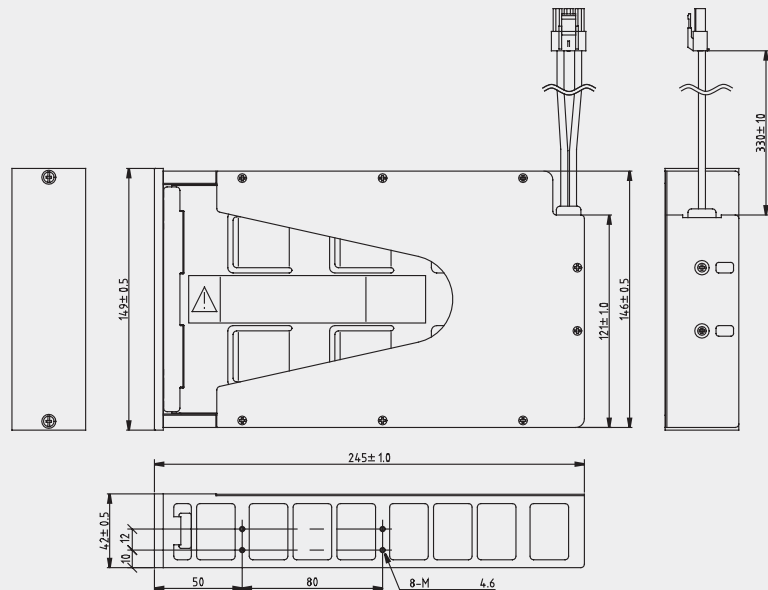

During storage the battery pack should be recharged every 6 months.

Tolerance ±0.5 mm

Specification is subject to change without notice. Errors excepted. Status as at: 09.12.2011