

Q670EM-IM-A

Micro-ATX, LGA1700 Socket for 13th / 12th Gen. CPU, Q670E Chipset, 4*U-DIMM, 3*Lan, 2*PCIe x16 slots, 2*PCIe x4 slots, 4*DP++, 2*M.2 slot, 10*COM, 7*SATA

Features

- Support up to 125W Intel® 13th / 12th Gen. CPU
- 2* PCIe x16 slots support dual graphic cards
- Four U-DIMM up to 128GB DDR5 4400 MHz
- Supports 4*DP
- 7-year longevity supply

Specifications




Processor System	CPU	LGA1700 for Intel® 13 th / 12 th Gen. Core™ i9/ i7/ i5/ i3/ Pentium® /Celeron® Processors Max. 125W TDP
	Chipset	Intel® Q670E Chipset
Memory	Technology	DDR5 4400MT/s (2DPC - 1DIMM 1R&2R) 4000MT/s (2DPC - 2DIMM 1R) 3600MT/s (2DPC - 2DIMM 2R)
	Max.	128GB
	Socket	4 x U-DIMM
Display	Display Port	4, Supports DP++ 1.4, up to 3840 x 2160 @ 60Hz
Expansion Slot	PCIe	1 x PCIe 5.0 x16 Slot (1 x16 mode/ 2 x8 mode) 1 x PCIe 4.0 x4 Slot (x4 mode) 1 x PCIe 5.0 x16 Slot (x8 mode) 1 x PCIe 4.0 x4 Slot (x4 mode)
	M.2	1 x M.2 E key, Type 2230 for WIFI/BT device (PCIe x1 & USB2.0 & CNVI) 1 x M.2 M key, Type 2242/2260/2280 (PCIe x4 /SATA mode) supports NVMe
Ethernet	Speed	10/100/1000/2500 Mbps
	Controller	1 x Intel® i210AT 1 x Intel® i226V 1 x Intel® i226LM (Intel vPro supported)
	Connector	3 x RJ-45
Audio	Codec	Realtek ALC897
Storage	SATA port	7 x SATA Gen 3.0, Up to 6Gb/s, Support RAID 0,1,5,10
Rear I/O	Display Port	4, Supports DP++ 1.4, up to 3840 x 2160 @ 60Hz
	USB 3.2 Gen1	2
	USB 3.2 Gen2	4 (3 x type A, 1 x Type C)
	Ethernet	3 x RJ45
	Serial Port	1 (RS232/422/485)
	Audio jack	3 (Line-Out, Line-In, Mic in)
Internal Connector	COM Header	9 x COM Header (RS232)
	USB3.2 Gen1	1 x Header Support Additional 2 x USB3.2 Gen1 Ports 1 x vertical connector
	USB2.0	2 x Header Support Additional 4 x USB2.0 Ports
	CPU Fan/ Chassis Fan	1 x Header (PWM Mode) / 3 x Header (PWM Mode)
	Front Panel Audio (AAFP)	1 x Header
	System Panel	1 x Header
	Chassis Intrusion	1 x Header
	Speaker connector	1 x Header
	I2C Header	1 x Header
	Clear CMOS	1 x Header
	COM Debug	1 x Header
	LPT port header	1 x Header
	Buzzer	1

Specifications

Internal Connector	PS/2	1 x Header	
	SPDIF	1 x Header	
	GPIO	1 x Header (8 Bit)	
	DIS ME jumper	1 x Header	
	AT/ATX Select Header	1 x Header	
	Power connector	1 x 24-pin ATX Power connector, 1 x 8-pin ATX 12V Power connector	
Security	TPM	1 x SPI TPM header	
Watchdog Timer	H/W	YES	
Power Type	Power Type	ATX	
OS & Software Support	Microsoft Windows	Windows® 10 (64bit) / Windows® IoT enterprise	
	Linux	Ubuntu, RedHat Enterprise, Fedora Workstation, OpenSUSE	
	ASUS IoT Suite	<input checked="" type="checkbox"/> HW Monitor	<input checked="" type="checkbox"/> Power Scheduling <input checked="" type="checkbox"/> Fan Control
		<input checked="" type="checkbox"/> Watch Dog Timer	<input checked="" type="checkbox"/> GPIO <input checked="" type="checkbox"/> I2C (API only)
		<input checked="" type="checkbox"/> Buzzer (API only)	<input checked="" type="checkbox"/> Linux Sample code
User Interfaces	<input checked="" type="checkbox"/> API <input checked="" type="checkbox"/> GUI		
Environment	Operating Temperature	0~60° C	
	Non-Operating Temperature	-40~85° C	
	Relative Humidity	Operational humidity: 40° C@10%~95%	
Mechanical	Dimensions	Micro ATX, 244 x 244 mm	
Certification	EMC (CLASS B)	CE, FCC, BSMI, VCCI, RCM	
	Safety	CE-LVD	

Block Diagram

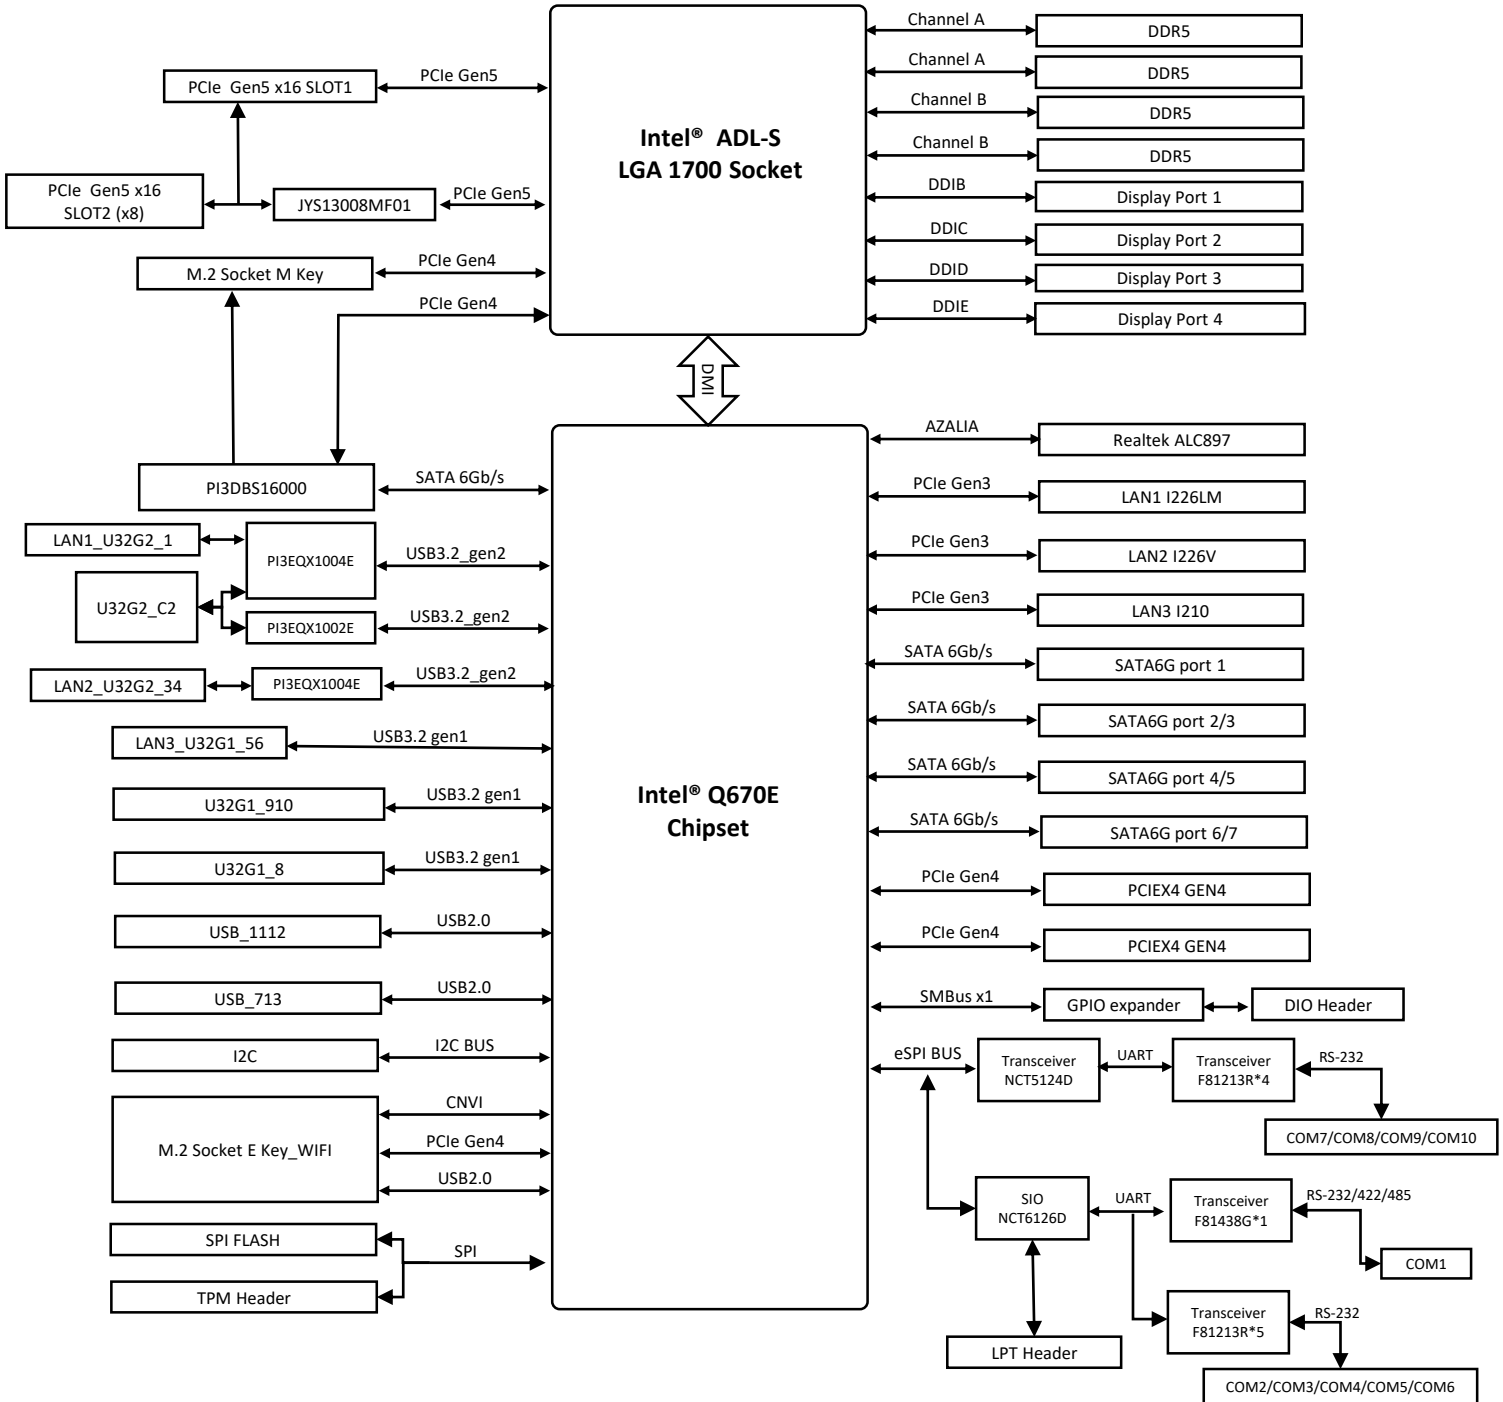

Order Information

Model name	Part number	Description
Q670EM-IM-A	90ME061*	LGA1700, Q670E, DP, MB

* The part number might vary for different regulations and package. Please consult the TPM in your region for exact 90PN.

Packing List

Part number	Description	Quantity
13020*	IO shield	1
14013*	SATA 6G CABLE	1
13020*	M.2 SCREW PACK	2

* The part number might vary due to part number revision.